



## Secure Storage for Your Digital Entertainment

Need a single solution that provides centralized storage and instant network access for all of your digital entertainment?

Life|storage™ provides up to 4 Terabytes of protected storage for your music, movies, pictures, recorded TV, and more. Connected to your home network, Life|storage gives you instant access to all of your digital entertainment anywhere in your home via Life|point® touch panels or Media Center computers.

With massive storage capacity for music, recorded TV, home videos or slideshows of your digital photos, Life|storage delivers digital content where and when you want it.

Easily installed and elegantly constructed, the Life|storage rack-mount unit fits in any standard 19-inch rack, and the set-top version can be placed on any horizontal surface.

For superior protection, capacity, and instant access, don't trust your digital media to anything less than Life|storage.

### Features

- Secure storage for all your movies, music, photographs, and recorded TV
- Easy access to all of your digital media
- Rack-mount or set-top—elegant design fits in with your high-end electronics
- Front panel DVD recorder/player

### Models

LSS-200 – 2 TB storage

LSS-300 – 3 TB storage



2007 Excellence Awards  
Windows Embedded Server Products OEM



## Hardware Specifications

**Operating System** – Windows® Storage Server

**Processor** – 3.4 GHz Intel® Pentium® D processor

**Memory** – 2 GB DDR RAM

**Storage** – Up to 4TB Raid 5 total storage on 4 hot-swap hard drives

**Audio** – Stereo line out, stereo line in, mic in

**DVD** – Slot-load, 8X DVD+/-R, 6X DVD-RW, 8X DVD+RW, 24X CD-R, 24X CD-RW, DVD-RAM Reading+5X Writing Speed

## Weight

49.5 lbs.


## Environmental Conditions

**Operating Ambient Temperature** – 45° F (7° C) to 75° F (24° C)

**Humidity** – 10% to 90% (non-condensing)

## Dimensions:

### Front View

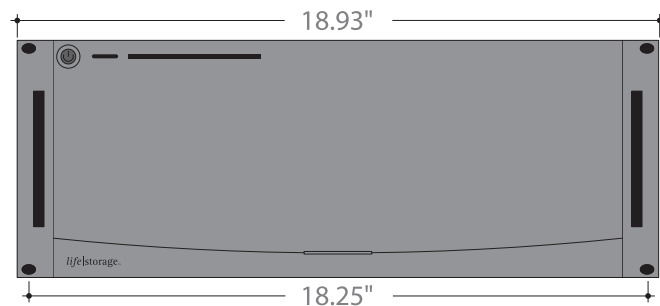

### Side View



## Connections

**Power (5 amp)** – 120 VAC, 60 Hz

**Power (2.5 amp)** – 120 VAC, 0.5 A or 240 VAC, 0.25 A

**USB** – 4 rear, 3 front (USB 2.0)

**LAN** – 10/100 Base-T Ethernet (RJ-45 jack)

**FireWire** – 1 rear, 2 front (IEEE 1394a)

**Digital Media** – 28-in-1 flash reader

## Wiring Requirements

**Ethernet** – CAT6 cable recommended (CAT5e acceptable)

**Power** – 120 VAC ISO 3-conductor cord  
240 VAC ISO 3-conductor cord

## System Updates

Via network; can be manually or automatically implemented.

## Warranty

**Parts** – 1 year

**Labor** – 90 days

Effective from date of shipment to the dealer

### Back View

